

DDS Tape Drive

User's Guide

SDT-10000 Series
SDT-11000 Series

This document contains proprietary information which is protected by copyright.

All rights reserved. No part of this document may be photocopied, reproduced or translated to another language without prior written consent of Sony.

The information contained in this document is subject to change without notice.

SONY MAKES NO WARRANTY OF ANY KIND WITH REGARD TO THIS DOCUMENT.

Sony shall not be liable for error contained herein, indirect, special, incidental or consequential damages in connection with the furnishing, performance or use of this document.

VORSICHT

Diese Ausrüstung erfüllt die Europäischen EMC-Bestimmungen für die Verwendung in folgender / folgenden Umgebung(en):

- Wohngebieten
- Gewerbegebiete
- Leichtindustrialgebiete

(Diese Ausrüstung erfüllt die Bestimmungen der Norm EN55022, Klasse B.)

사용자 안내문

이 기기는 가정용으로 전자파 적합등록을 한 기기로서 주거지역에서는 물론 모든 지역에서 사용할 수 있습니다.

Contents

Introduction	4
Product Features	4
Precautions	5
Installation	6
SCSI Connection/Setting the SCSI ID/Option Switches	6
Option Switches (DIP Switch) ..	7
Mounting Holes	8
Remodeling from 5.25" Model to 3.5" Model	10
Orientation	11
Operation	12
Location of 3 LEDs	12
LED Indication for Drive Status	13
Drive Operation	14
Emergency Cassette Removal Procedure	15
Interface Implementation	17
Supported SCSI Messages	17
Supported SCSI Commands	17
Specification	18
Product Specifications	18
Third Party Support Contacts (In the USA)	20
Sony Contacts	22

SDT-10000/SDT-11000 DDS-4 Tape Drive

Congratulation on your purchase of the Sony DDS-4 drive SDT-10000/
SDT-11000.

This drive is a high capacity data storage device using 4mm DAT (Digital Audio Tape) technology. The SDT-10000/SDT-11000 drive achieves high data reliability through Read-After-Write, an additional level of Error Correction Code, and other features.

The Sony SDT-10000/SDT-11000 drive stores data on tape using a standard format called DDS (Digital Data Storage), DDS-4, DDS-3, DDS-2, DDS-DC and DCLZ formats. These formats are used by many other DDS tape drive manufacturers, providing a broad range of compatible tape drives.

The Sony SDT-10000/SDT-11000 is fully READ and WRITE compatible with the DDS-4, DDS-3, DDS-2, DDS and DDS-DC format tapes.

Introduction

Product Features

	SDT-10000/SDT-11000 (With Data Compression)
Data Capacity	40 GB (typical)*
Transfer Rate (sustained)	4.7 MB/sec (typical)*

- Supported Formats: DDS-4, DDS-3, DDS-2, DDS, DDS-DC and DCLZ
- High Burst Transfer Rate- 14MB/sec Asynchronous
40MB/sec Synchronous
- Large 10MB Buffer
- 3.5" Standard Height, 5.25" Half Height
- Embedded Wide Ultra SE SCSI Interface (SDT-10000)
- Embedded Wide Ultra LVD/SE SCSI Interface (SDT-11000)
- Supports Variable or Fixed Record Length
- Supports SCSI-2 Sequential-access Devices Command Set
- Read After Write (RAW)
- Frame Rewrite Function
- Three Levels of Error Correction Code (ECC)
- Quick Search (Forward: 115 times / Reverse: 155 times
normal DDS-4 Read / Write speed)
- Random Read
- N-Group Write Option (DDS-2, DDS and DDS-DC only)
- Dual Partition Option
- SCSI Disconnection/Arbitration

* Assuming 2:1 compression. Actual capacity and transfer rate may vary since compression is depending upon data type.

Precautions

Installation

Avoid placing the drive in a location subject to:

- high humidity
- high temperature
- mechanical shock and vibration
- direct sunlight

Operation

- * Do not move the drive while it is operating. Doing so may cause a malfunction.
- * Avoid exposing the drive to sudden changes from low to high in temperature. This may cause water condensation to collect inside the drive. If the ambient temperature should suddenly rise while the drive is turned on, wait at least one hour before turning on the drive. If you attempt to operate the drive immediately after a sudden increase in temperature, a malfunction may occur.
- * Do not turn off the drive while a tape is inside the drive.

Transportation


- * Keep the original packing materials for possible future shipments of the drive.
- * Be sure to remove any tapes from drive prior to transportation. After removing the drive from the computer, repack the drive into its original packaging.

Notice of SCSI Termination

This SDT-10000/SDT-11000 conforms to the Microsoft PC97 Hardware Design Guide which requires the internal drive to be terminated with an external terminator.

Microsoft PC97 SCSI requirements

SCSI peripherals must not terminate the bus. Both internal cable ends are instead terminated by plug-in connectors.



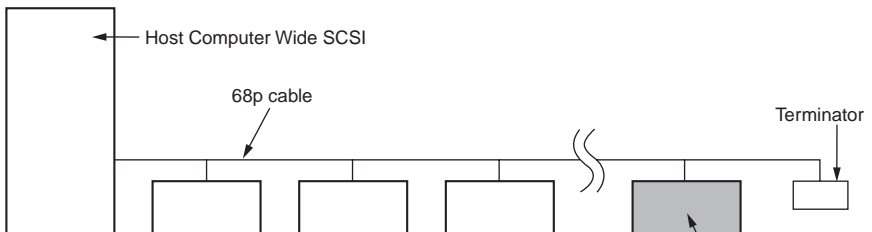


Example of SCSI set-up

Installation

SCSI Connection/Setting the SCSI ID/Option Switches


SCSI 68 pin connector (Non-Shielded)

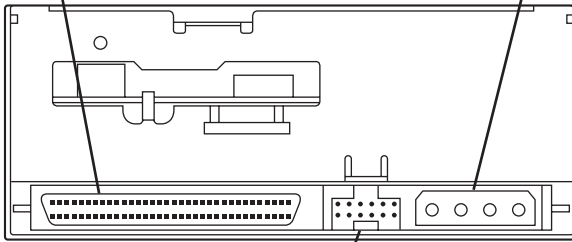

SCSI ID


SCSI ID	Pin 15	Pin 14	Pin 13	Pin 12	Pin 11	Pin 10	Pin 9	Pin 8	Pin 7	Pin 6	Pin 5	Pin 4	Pin 3	Pin 2	Pin 1
0	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
1	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
2	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
3	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
4	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
5	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
6	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
7	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
8	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
9	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
10	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
11	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
12	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
13	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
14	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■
15	■	■	■	■	■	■	■	■	■	■	■	■	■	■	■

Jumpers





Parity Enable
Reserved
SCSI ID 3
SCSI ID 2
SCSI ID 1
SCSI ID 0

Parity



Note : ■ = CLOSE/Jumper
 ■ = OPEN/Jumper not installed
 □ = Don't care

Option Switches (DIP Switch)

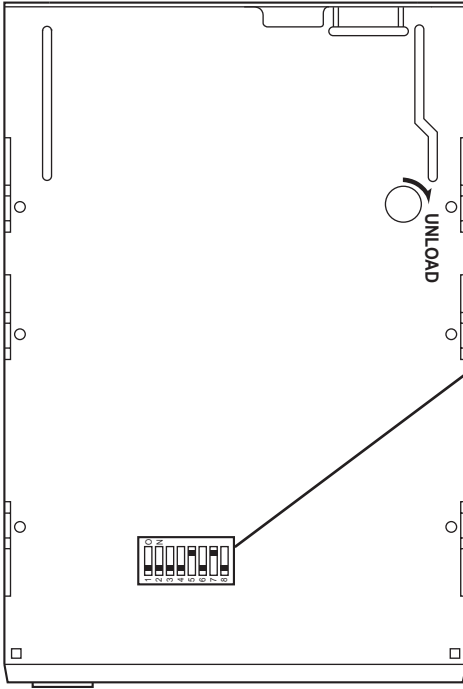


- 1 Reserved (OFF)
- 2 Reserved (OFF)
- 3 Reserved (OFF)
- 4 Reserved (OFF)
- 5 Terminator Power (ON)
- 6 Reserved (OFF)
- 7 DC Control-1 (ON)
- 8 DC Control-2 (OFF)
- () ... default setting

Terminator Power	Definition
OFF	No provided
ON	Provided


DC Control-1	DC Control-2	Definition
OFF	OFF	Compression disabled at power-on. The host is allowed to control compression.
OFF	ON	Compression disabled at power-on. The host is not allowed to control compression.
ON	OFF	Compression enabled at power-on. The host is allowed to control compression.
ON	ON	Compression enabled at power-on. The host is not allowed to control compression.

Mounting Holes

For 3.5" Standard Height (SDT-10000, SDT-11000)

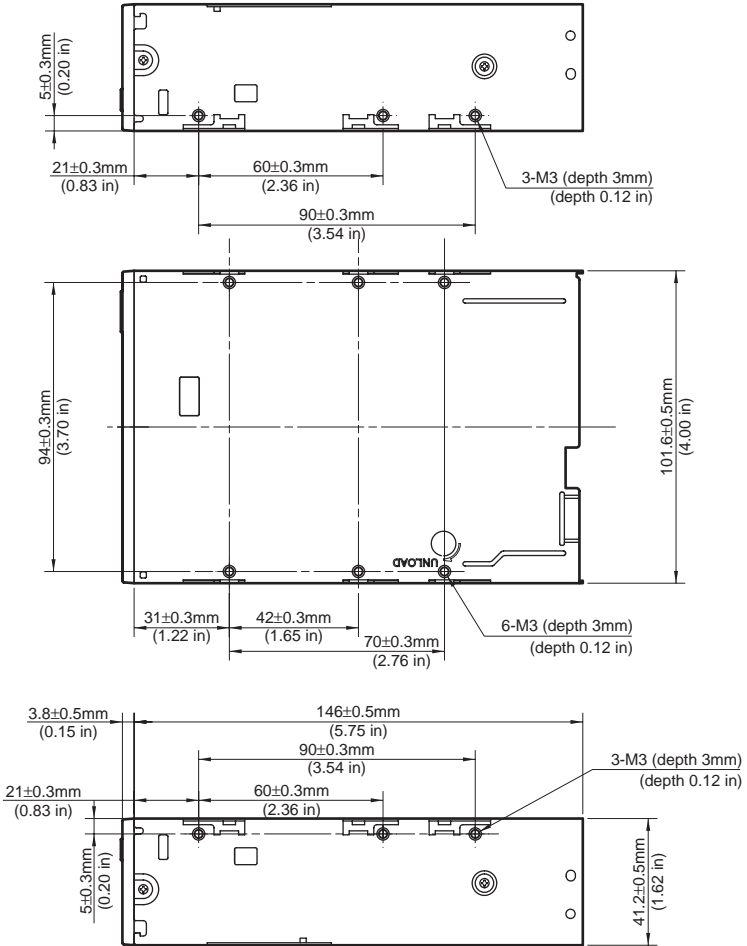

For 5.25" Half Height (SDT-1000/R, SDT-11000/R)

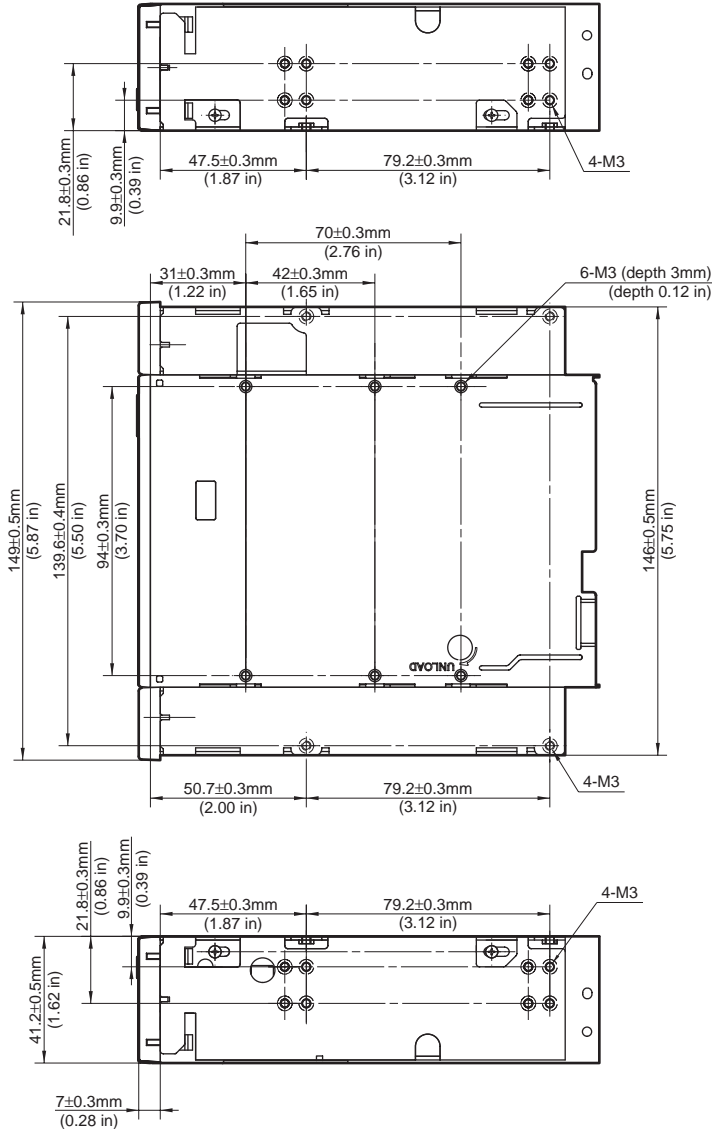


Remodeling from 5.25" Model to 3.5" Model



You can remodel the SDT-10000/R and the SDT-11000/R (5.25" model) to the SDT-10000 and the SDT-11000 (3.5" model) yourself.

1 Remove the 2 screws for each side rail.

2 Take the side rail off.

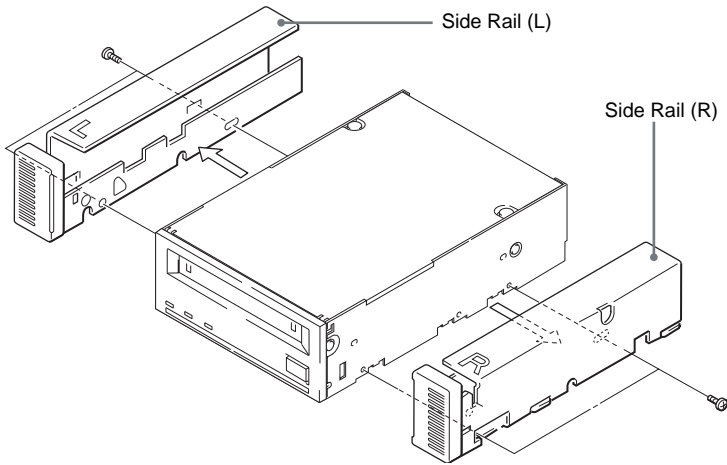

Orientation

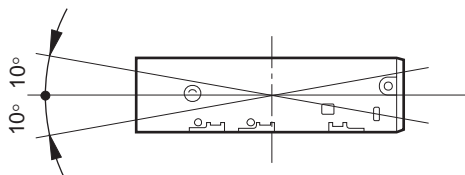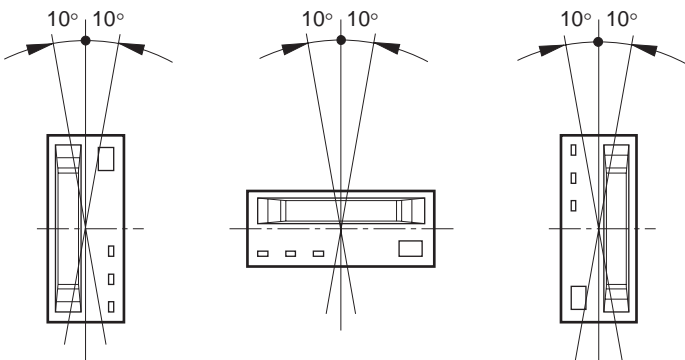


Operation

Location of 3 LEDs

There are three LED indicators (BUSY, TAPE and STATUS) and an EJECT button on the front panel of the unit.

Front Panel (for 3.5" Standard Height)

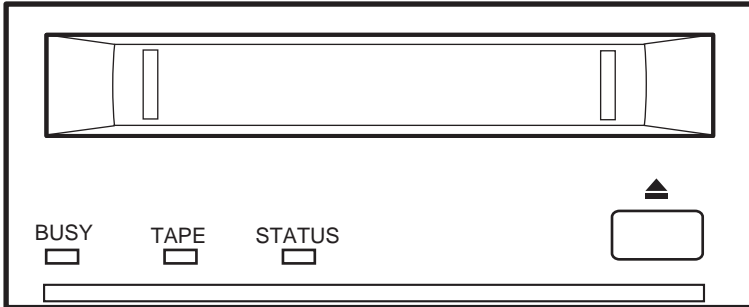

LED Indication for Drive Status

LED			State		
BUSY	TAPE	STATUS	Activity	Cartridge	Other
			None	None	None
			SCSI	None	None
			Drive	Loading/Unloading	None
			Drive	Loading/Unloading	Write Protected
			None	Loaded	None
			SCSI	Loaded	None
			SCSI/Drive	Loaded	None
*			*	Loaded	Write Protected
			None	Loaded	Cleaning Tape at EOM
*		*	*	Loaded	Error Rate Warning
*	*		*	*	Cleaning Request
*	*		*	*	Selftest Failure
	*	*	*	*	Waiting for Reset
*		*	*	*	Waiting for Eject

* : Not defined.



3.5 sec on / 0.5 sec off



off



1 pulse (0.25 sec on)



on



2 pulse (0.25 sec on),
0.5 sec off



0.25 sec on / 0.25 sec off

Drive Operation

Loading a Cassette

Insert a cassette into the slot on the front panel with the arrow on the cassette pointing towards the drive. When the cassette is inserted, the drive takes it and automatically loads it into drive mechanism.

Unloading a Cassette


The cassette can be removed from the SDT-10000/SDT-11000 either in response to a SCSI Unload Command, or by pressing the eject button.



By pressing Eject button, the tape goes to BOM, the drive unthreads it, and ejects the cassette from the slot..

Write-protecting a Cassette

Cassettes can be write-protected by sliding the tab on the back of the cassette open..

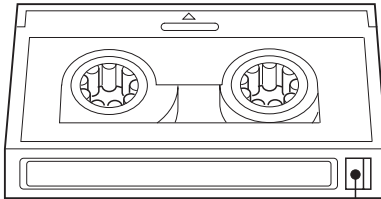In this state, data can be read from the tape but not written onto it.



-  Using your fingernail, push the switch in the direction of the arrow to avoid accidental overwriting or erasure of data.
-  Return the switch to its original position to re-enable writing.

Using a Cleaning Tape

The SDT-10000/SDT-11000 has a built-in super head cleaner designed to last for the life of the drive.

In addition, a cleaning tape should be used periodically to clean the entire tape path.

The drive will automatically request you to perform a cleaning operation.

The need for a cleaning tape is determined by the drum rotating hours since the last cleaning was performed. The drive will request a cleaning operation every 24 hours of drum rotation. (DDS-4)

Emergency Cassette Removal Procedure

In case the tape is stuck inside the drive, you could remove the tape cartridge manually.

- 1** Remove the drive from the chassis or enclosure to allow access to the bottom and left side of the drive.
- 2** Remove the drive's top cover to monitor the degree of tape slack throughout the process.

Note

Never touch the inside of the drive when the top cover is opened. Otherwise it may cause a trouble.


- 3** Rotate the Loading/Threading motor clockwise with a small screwdriver (ex. Phillips "+" No. 1) put into the plastic screw head on the back of the drive (see the location in a drawing below).

This will enable you to move back the threading mechanism to the initial position.

Notes

- Do not rotate the screw further when you reach to the mechanical limit to avoid damage on the mechanism.
- To prevent damage on the tape, take up the slack of tape from time to time by clicking the ratchet mechanism located on the left side of the drive.

- 4** Continue the procedure until the tape is lifted out of the drive mechanism and ejected.
- 5** Return the drive to a service station for repair.

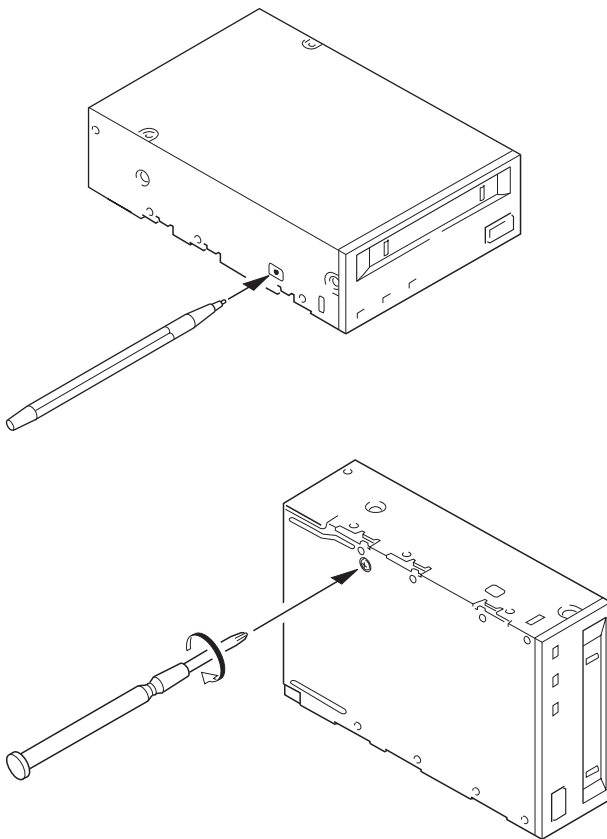

Interface Implementation

Supported SCSI Messages

Abort	Ignore Wide Residue
Bus Device Reset	Initiator Detected Error
Command Complete	Message Parity Error
Disconnect	Message Reject
Extended Message	No Operation
- Synchronous Data Transfer Request	Restore Pointers
Identify (w/&w/o Disconnect)	Save Data Pointer

Supported SCSI Commands

Erase	Receive Diagnostic Results
Inquiry	Release Unit
Load/Unload	Report Density Support
Locate	Report Luns
Log Select	Request Block Address
Log Sense	Request Sense
Mode Select (6)	Reserve Unit
Mode Sense (6)	Rewind
Prevent Allow Medium Removal	Seek Block
Read	Send Diagnostic
Read Block Limits	Space
Read Buffer	Test Unit Ready
Read Position	Verify
	Write
	Write Buffer
	Write Filemarks

Specification

Product Specifications

Dimensions

	3.5" Standard Height	5.25" Half Height
Height	41.2 mm (1.62 in)	41.2 mm (1.62 in)
Width	101.6 mm (4.0 in)	146.0 mm (5.75 in)
Depth	146.0 mm (5.75 in)	146.0 mm (5.75 in)

Altitude

Operating	0 to 7000 feet
-----------	----------------

Vibration

Operating	Swept Sine 5 to 500 Hz *0.25 G Peak 1 Octave/min. 3 axes, 3 directions
Non-Operating	Swept Sine 5 to 500 Hz *0.5 G Peak 1 Octave/min. 3 axes, 3 directions

Acoustic Noise

(A) curve weight

Streaming Write/Read	35 db (A)
Insert/Eject	60 db (A)

Note

The sound-meter on (A) scale is located 1m in front of the center of the drive front panel.

Shock

Operating	No Data Loss Half Sine Performance 5 G Peak 3 ms 3 axes, 3 directions *Interval 10 seconds
Non-Operating	No Device Damage Half Sine 90 G Peak 3 ms (30 G Peak 11 ms) 3 axes, 3 directions

Temperature and Humidity Range

Temperature

Operating	5 °C to 40 °C ($\Delta T < 10$ °C/h)
Non-Operating (mech)	- 40 °C to 70 °C ($\Delta T < 20$ °C/h)
Non-Operating (tape)	- 40 °C to 45 °C ($\Delta T < 20$ °C/h)

Humidity

Operating	20 to 80% RH, non-condensing Maximum wet bulb temperature = 26 °C
Non-Operating (mech)	5 to 95% RH ($\Delta RH < 30\%$ /h)
Non-Operating (tape)	20 to 80% RH ($\Delta RH < 30\%$ /h)

Power Requirements

Voltage	Max Ripple	Current	
		Typical	Maximum
5 V +/- 5 %	100 mVp-p	1.0 A	2.0 A
12 V +/- 10 %	100 mVp-p	0.3 A	1.6 A

Suspended Particulate

Operating	Less than 150 microgram/m ³
-----------	--

ESD

Discharge	< 15 kV: No operation failure
Voltage	< 20 kV: No drive damage

Air-cooling Requirement

Surrounding temperature	< 40 °C
-------------------------	---------

Clean air flow is recommended to minimize the possibility of data loss.

Third Party Support Contacts (In the USA)

Host Adapter Vendors	Phone Numbers
Adaptec	408-945-8600
ATTO	716-691-1999
Bus Logic	408-492-9090
DPT	407-830-5522
Future Domain	714-253-0400
Initio	408-988-1919
Qlogic	714-438-2200
Ultra Systems Inc.	714-367-8800

Operating Systems	Backup Software Vendors	Phone Numbers
DOS	Arcada	407-333-7500
	Cheyenne	516-484-5110
	Columbia Data Products	407-869-6700
	Corel	613-728-8200
	NovaStor	805-579-6700
	Palindrome	708-505-3300
	ST. Bernard Software	619-676-2277
	Sytron	508-898-0100
Macintosh	Tapedisk	715-235-3388
	Cheyenne	516-484-5110
	Corel	613-728-8200
	Dantz	510-253-3000
OS/2	NovaStor	805-579-6700
	Cheyenne	516-484-5110
	Corel	613-728-8200
	IBM	800-426-3333
	Sytron	407-333-7500
Windows	Arcada	407-333-7500
	Cheyenne	516-484-5110
	Corel	613-728-8200
	Creat	909-595-8811
	NovaStor	805-579-6700
	ST. Bernard Software	619-676-2277
Windows NT	Sytron	508-898-0100
	Arcada	407-333-7500
	Cheyenne	516-484-5110
	Creat	909-595-8811
	Microsoft	206-882-8080
	NovaStor	805-579-6700
Windows NT Advanced Server	Avail Systems	303-444-4018
	Microsoft	206-882-8080

* All phone numbers listed are in the USA.

Add the country code (1) prior to those numbers when calling from outside the USA.

Operating Systems	Backup Software Vendors	Phone Numbers
Windows 95	NovaStor	805-579-6700
DEC Unix	Cheyenne	516-484-5110
	NovaStor	612-933-8790
	Software Moguls	612-933-8790
	Work Station Solutions	603-880-0080
SUN Unix	Legato	415-812-6000
	NovaStor	818-707-9900
	Software Moguls	612-933-8790
	Sun Soft	310-348-8649
	Work Station Solutions	603-880-0080
Solaris Unix	Cheyenne	516-484-3150
	Legato	415-812-6000
	NovaStor	818-707-9900
	Software Moguls	612-933-8790
	Sun Soft	310-348-8649
	Work Station Solutions	603-880-0080
SCO Unix	Cheyenne	516-484-3150
	Legato	415-812-6000
	Software Moguls	612-933-8790
	Work Station Solutions	603-880-0080
NCR Unix	NovaStor	818-707-9900
	Work Station Solutions	603-880-0080
HP Unix	Cheyenne	516-484-3150
	NovaStor	818-707-9900
	Work Station Solutions	603-880-0080
AIX Unix	Cheyenne	516-484-3150
	Legato	415-812-6000
	NovaStor	818-707-9900
	Software Moguls	612-933-8790
	Work Station Solutions	603-880-0080
Interactive Unix	Sun Soft	310-348-8649
SGI Unix	Software Moguls	612-933-8790
	Work Station Solutions	603-880-0080
Novell UNIXware	Novell	801-263-3500
Novell NLM	Arcada	407-263-3500
	Avail Systems	303-444-4018
	Cheyenne	516-484-3150
	Columbia Data Products	407-682-0265
	Creata	909-595-8811
	Legato	415-812-6000
	NovaStor	818-707-9900
	Novell	801-419-5544
	Palindrome	708-505-3300
	Performance Tech	210-979-2110
	ST. Bernard Software	619-676-2277
	Symantec	310-449-4156
	Sytron	508-898-0100
Banyan	Performance Tech	210-979-2110
Lantastic	NovaStor	818-707-9900
Amiga	Moonlighter	407-384-9484
RS6000	Legato	415-812-6000
	NovaStor	818-707-9900
	Software Moguls	612-933-8790

Sony Contacts

For further information, please contact:

Sony Electronics Inc., Technical Support

3300 Zanker Road San Jose, CA95134, 1940. USA
TEL: (1) 800-352-7669

Sony Corporation

**Electronic Devices Marketing Group, Product Marketing Div.
Computer Peripherals Dept. Tape Streamer Section**

Osaki Gate City East Tower, 1-11-1, Osaki
Shinagawa-ku, Tokyo, 141-0032 Japan
TEL: (81) 3-5435-3486 FAX: (81) 3-5435-3565

Sony of Canada Ltd., AV/IT Marketing Group

Computer Peripherals Product Marketing

115 Gordon Baker Road Toronto, Ontario, M2H 3R6 Canada
TEL: (416) 499-1414 or (1) 800-961-7669
FAX: (416) 499-8541

Sony Computer Peripherals & Components Europe

URL: <http://www.sonyisstorage.com/>

**Electronics Devices Marketing (Singapore)
(A division company of Sony Electronics (S) Pte. Ltd.)**

Enterprise Storage Solutions Dept.

2 International Business Park, #01-10 Tower One,
The Strategy, Singapore 609930
TEL:65-6544-8000 FAX:65-6544-7390

Sony Corporation of Hong Kong Ltd.

Computer Peripheral Sales & Marketing Division

Electronic Devices Marketing Hong Kong

45/F, The Lee Gardens, 33 Hysan Avenue, Causeway Bay, Hong Kong
TEL: (852) 2909-1008 FAX: (852) 2909-2001

Sony Corporation of Hong Kong Ltd. Beijing Rep. Office

Computer Peripheral Div.

Full Link Plaza Tower A 11/F., No.18 Chaoyangmenwai Ave., Beijing
100020 P.R.C.
TEL:86-10-6588-0558 FAX:86-10-6588-0855
URL: <http://www.sony.com.cn>

Sony Corporation of Hong Kong Ltd. Shanghai Rep. Office

44F., HSBC Tower, 101 Yin Cheng East Road, Pudong, New Area,
Shanghai, P.R.C. Postcode 200120

TEL: 86-21-6841-3222 FAX: 86-21-6841-0280

Sony Comércio e Indústria Ltda.

Rua Inocêncio Tobias, 125-Parte-Parque Industrial Thomas Edson-Barra
Fundada, CEP01144-000, São Paulo -SP-Brasil

TEL: (55) 11-3824-6586 to 6598 FAX: (55) 11-3611-9064

URL: <http://www.sonybrasil.com>

Sony Australia Ltd., Information Technology Products Division

P.O. Box 377, NSW 1670, Australia

TEL: 1800-226-429 FAX: (61) 2-9870-8564 A.C.N. 001 215 354

URL: <http://www.sony.com.au/home.asp>

E-mail: informatica@ssp.br.sony.com

Sony Chile Ltda

Av. Kennedy 8017, Las Condes, Santiago, Chile

TEL: (02) 210-6000 FAX: (02) 210-5417

Sony Taiwan Limited

**Computer Peripheral Dept. Electronic Devices Marketing Taiwan
Company**

Rm 1506, Top FL., Chia Hsin Bldg. No.96, Sec.2, Chung Shan N. Rd.,
Taipei, Taiwan

TEL: 886-2-2522-3286 FAX: 886-2-2562-4587

Sony Korea Corporation EDMK CP Sales & Marketing Team

34F, ASEM Tower, World Trade Center, 159-1, Samsung-Dong,
Kangnam-Ku, Seoul, 135-798, Korea

TEL: 82-2-6001-4249 FAX: 82-2-6001-4115

URL: <http://www.sony.co.kr/cp/>

Sony Gulf FZE Computer Display & Peripheral Div.

P.O.BOX 16871, Jebel Ali, Dubai, U.A.E.

TEL: 971-4-8815488 or 8816912 FAX: 971-4-8817210 or 8816259

<http://www.sony.net/>

Printed on recycled paper

Printed in Japan